




Partial Thread

Washer undersurface designed to prevent rotation without compromising integrity of cortical surface

Available in: 4.5 and 5.0mm Diameters 25-50mm Lengths (5mm increments)



Tapered minor diameter on screw tip assures immediate thread engagement for precise screw placement

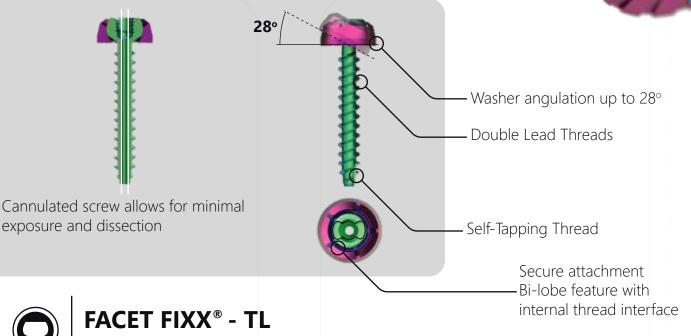

TransLaminar Screw System

Partial Thread

Lag feature maximizes compression of the facet articulation process

Available in: 4.5 and 5.0mm Diameters 35-60mm Lengths (5mm increments)



Tapered minor diameter on screw tip assures immediate thread engagement for precise screw placement



SIMPLE STEPS

1. Insert K-Wire, Then Tube #1

- 2. Insert DTS Guide (Tube #2 & #3)
- 3. Drill (& Tap), then Remove Tube #2
- 4. Insert screw through DTS Guide

, Locking feature retains dilator tubes during procedure

 $(\mathbf{1})$

2

(4)

The state of the s